

Triangular towers have less parts than rectangular or cube units, but assembly steps are the same.

1. Connect each frame side to the plastic corner, then fasten the side using the screws provided.
2. Repeat step 1 for each frame side.

Graphic Installation

3. To install the graphic, take Corner A with the pull tag on it and press about 6"-10" of silicone into the frame channel.

Repeat for the opposite Corner B. Repeat for Corner C. Lastly, repeat for the final corner.


4. After all corners are pressed in, press the silicone into the frame channel at the mid-points on all four sides.

This prevents the graphic from bunching up or stretching too much and will ensure a smooth and tight fit.

5. Press silicone into frame evenly between the corners and midpoints.

6. To remove the graphic from the frame, simply pull up on the corner.

7. Repeat graphic installation for remaining sides (not shown).

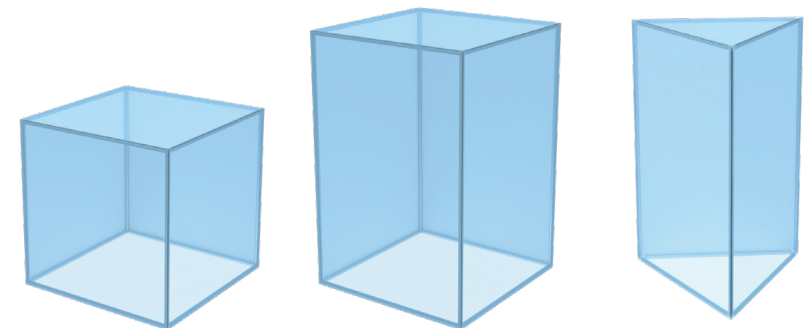

Cube
XS4C shown

Rectangular
Tower
XS4T shown

Triangular
Tower
XS4G shown

